



### FEATURES

- Electromechanical vibration head assembly (200-240 Hz)
- Super rigid four rail table slide system
- One piece flame cut bridge (heaviest in class)
- Structural tubular steel table (heaviest in class)
- Solid state 40hp digital variable frequency drive
- Hydraulic lift / clamp force maximum 4500 lbs. (20,000N) 20 gallon ( 75.6L) reservoir
- Real time graphing of amplitude, force and distance
- B&R 15" color industrial computer HMI
- B&R input and output for all standard machine functions
- Intuitive and interactive comprehensive help menu
- Part parameter monitoring with programmable limits
- Programming for up to 6 part in place sensors included (sensors not included)
- Programming for up to 6 pneumatic valves included (valves not included) with 6 extend & 6 retract sensors
- Programming for 2 vacuum (vacuum generator and valve not included)
- Programming for tool ID included.
- Multilingual capabilities (English, Spanish, German, Japanese, Chinese, French, Czech)
- Automatic tuning with auto ping mode
- Programmable amplitude 0.020" to 0.070" (.05 to 1.8 mm)
- Weld by time or weld by distance
- Programmable Amplitude and Pressure profile up to 5 steps

- Interior work light
- Optical zero force cycle start activation switches
- Light curtain for single switch activation

### SPECIFICATIONS

- Table and maximum lower tool size 38" x 18" (965 x 455 mm)\*
- Door Opening 26" high x 41" wide (660 x 1040 mm)
- Upper tool weight 35 – 90 lbs. (15 - 40 kg)
- Upper tool maximum size 18" x 30" (450 x 760 mm)
- Low 41" (1040 mm) lift table height
- 20" (500mm) stroke, 25" (630mm) max. opening
- Small 44.5" x 81" (1.2 x 2.1 m) foot print
- 80 dB maximum in operation (continuous measurement)

### Options

- Position adjustable cycle activation switches
- Exterior work light
- Optional PLC for custom functions (will not run standard machine operation)
- Custom paint specification
- Rear sliding door for pass through operation
- Programmable pneumatic valves for clamps and slides
- Programmable part-in-place sensing.

\* Tooling can in some instances overhang the back of table by modest amount. Consult Dukane for more information.



\*\* Custom lift table or custom frame can be quoted to allow for an uninterrupted bucket of greater depth.

[www.dukane.com/us](http://www.dukane.com/us) • e-mail: [ussales@dukane.com](mailto:ussales@dukane.com)


# Vibration Welder Model VW5500 Floor Layout

## VW5500

6800 LBS

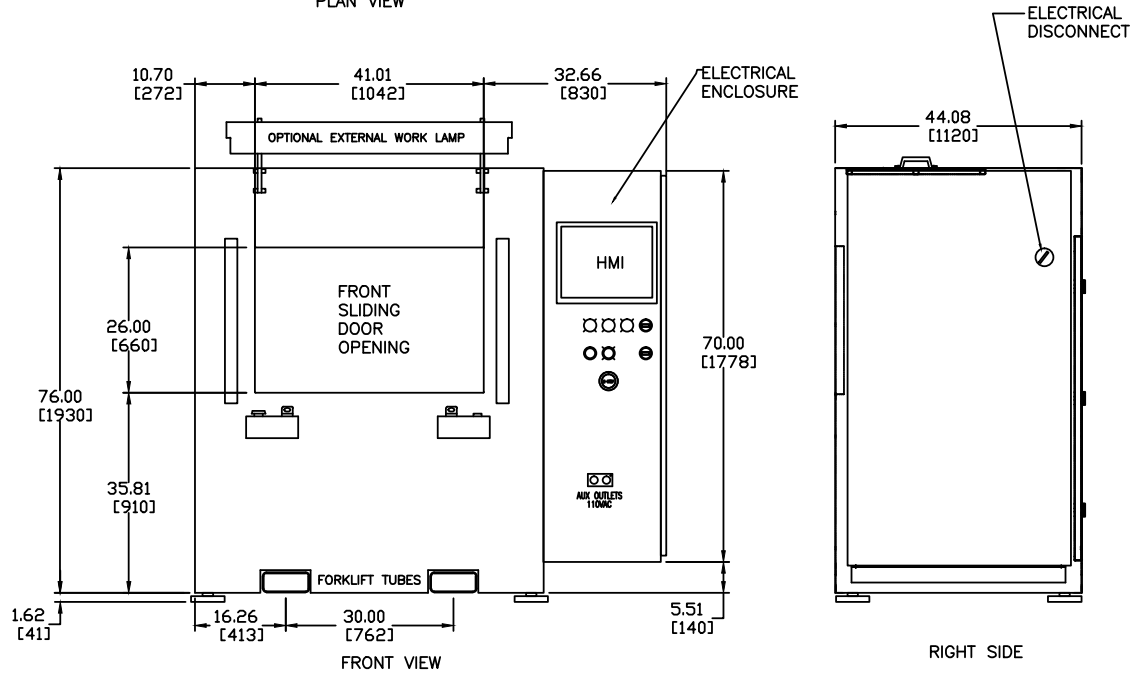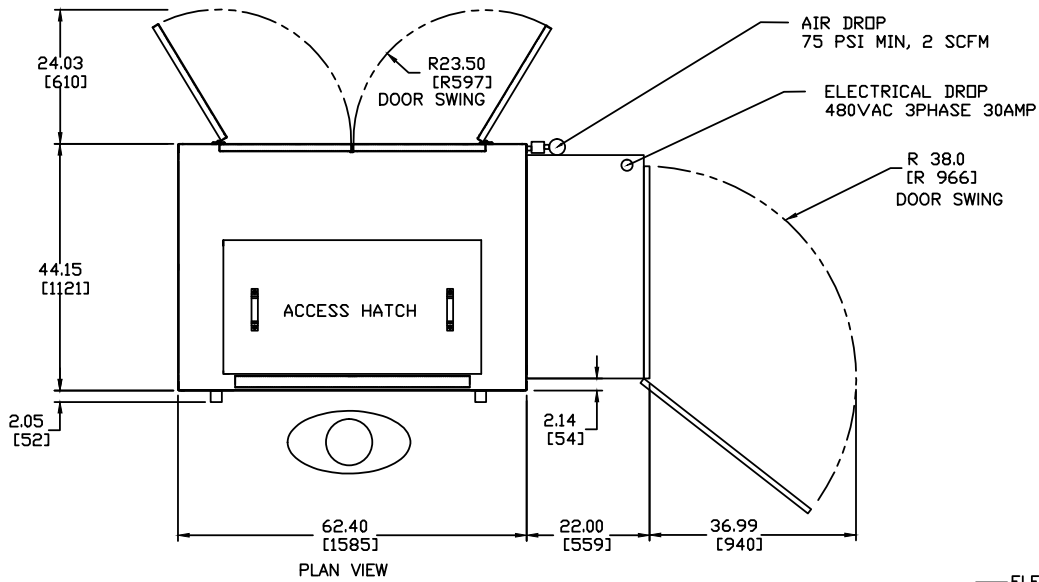

### Fixture hole patterns and dimensions

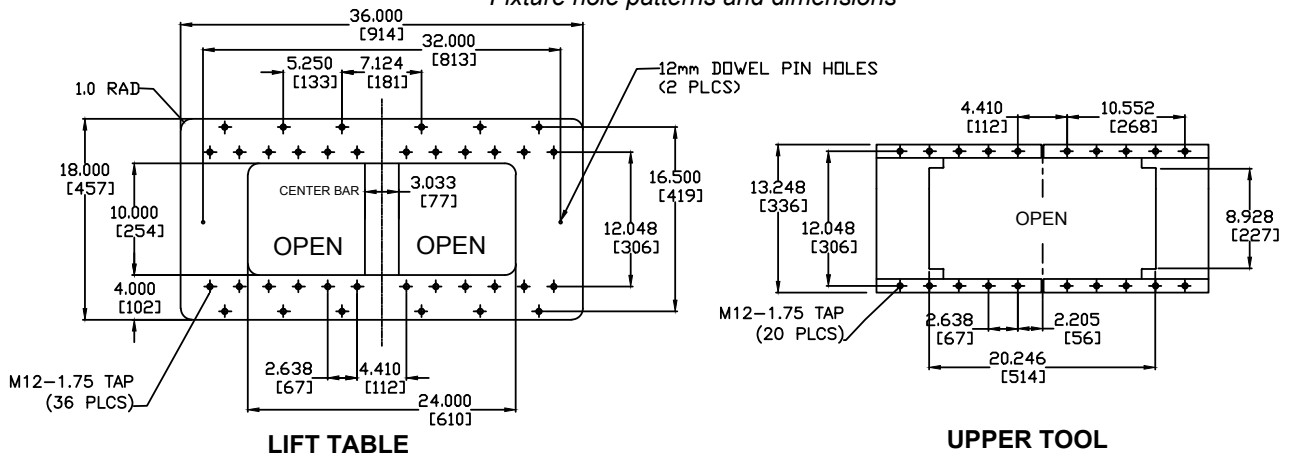

Note: All specifications are subject to change without notice. Please consult Dukane Ultrasonics for any updated information.